

1

2

3

4

5

6

版次

日期

内

容



A

B

C


D

E

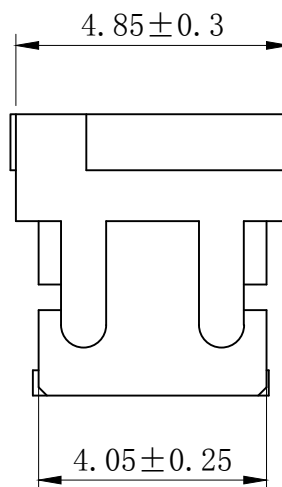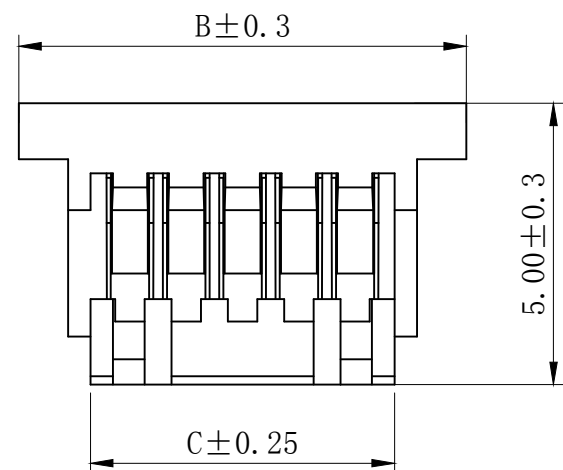

## Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range:  $-25^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
- 4、Contact resistance: Initial value/ $20\text{m}\Omega$  max
- 5、Insulation resistance:  $100\text{M}\Omega$  min
- 6、Withstanding voltage:  $500\text{V AC/minute}$
- 7、Material : Nylon UL94V-0(2)

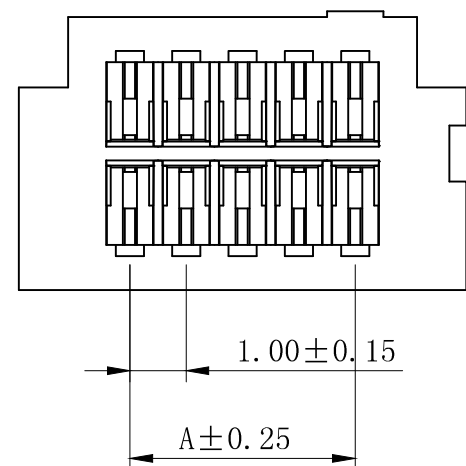

Circuits	Dimension mm		
	A	B	C
4	1.00	5.00	2.40
6	2.00	6.00	3.40
8	3.00	7.00	4.40
10	4.00	8.00	5.40
12	5.00	9.00	6.40
14	6.00	10.00	7.40
16	7.00	11.00	8.40
18	8.00	12.00	9.40
20	9.00	13.00	10.40
—	—	—	—
50	24.00	28.00	25.40

浙江乐马电气有限公司			设计	张书晨	
尺寸公差	角度公差	品名:	SHD-nY	审核	王佳
.X $\pm 0.25$	X.° $\pm 3.0^{\circ}$	图号:		10004-Y	批准
.XX $\pm 0.15$	.X° $\pm 2.0^{\circ}$	单位:	比例:		页数:
.XXX $\pm 0.05$	.XX° $\pm 1.0^{\circ}$	mm	--	1/1	A

1

2

3

4

5

6