
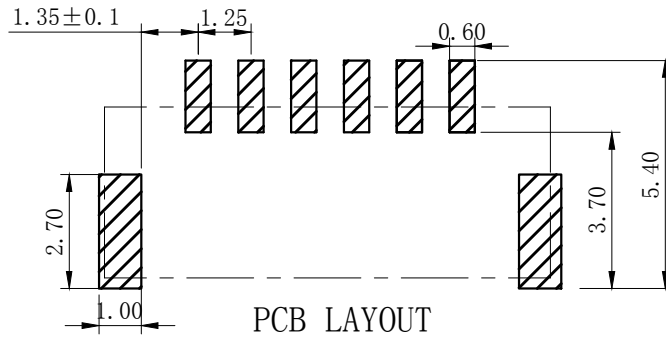
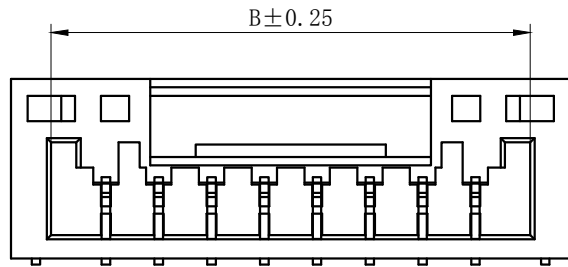
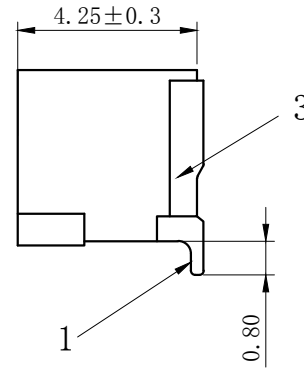


序号	名称	材料
1	插针	磷青铜 (镀锡)
2	底座	LCP UL94V-0
3	焊片	磷青铜 (镀锡)

版次	日期	内容

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/30mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 500V AC/ minute

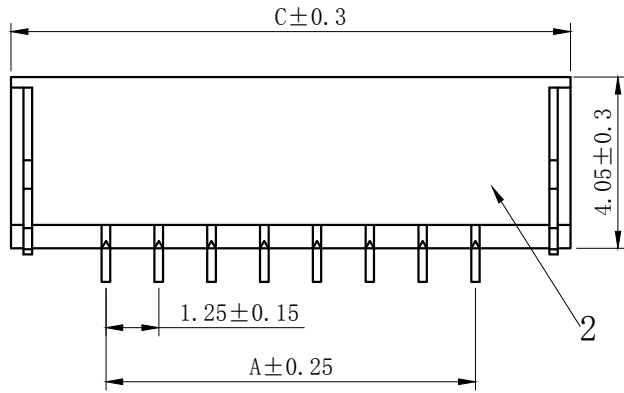

孔位 poles	A	B	C
2	1.25	3.85	5.75
3	2.50	5.10	7.00
4	3.75	6.35	8.25
5	5.00	7.60	9.50
6	6.25	8.85	10.75
7	7.50	10.10	12.00
8	8.75	11.35	13.25
9	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00
16	18.75	21.35	23.25
18	21.25	23.85	25.75
20	23.75	26.35	28.25

浙江乐马电气有限公司		设计	张书晨	
尺寸公差	角度公差	品名:	GH-nAWB	审核
.X ±0.25	X.° ±3.0°	图号:	12502-AWB	王佳
.XX ±0.15	.X° ±2.0°	批准	陈其林	
.XXX ±0.05	.XX° ±1.0°	单位:	mm	
		比例:	--	页数:
				1/1
				版本:
				A