
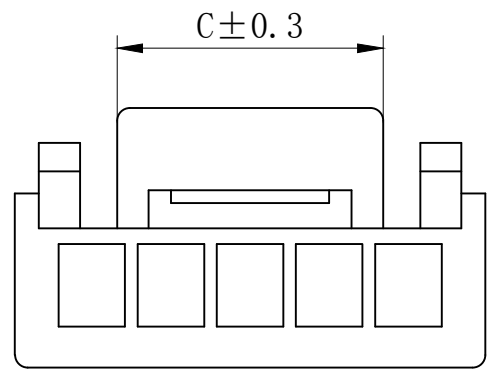
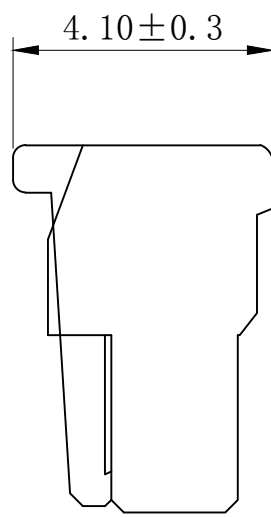


5		6	
版次	日期	内 容	

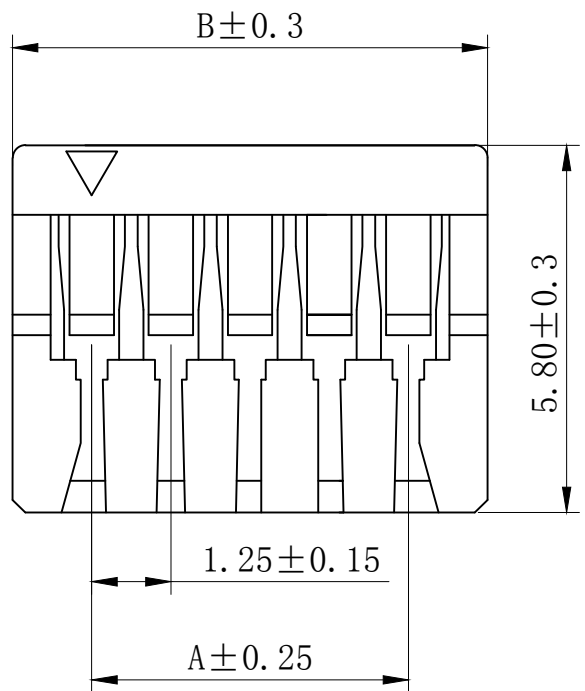

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/30mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 500V AC/ minute
- 7、Material : Nylon UL94V-0(2)

孔位 poles	A	B	C
2	1.25	3.75	2
3	2.50	5.00	3
4	3.75	6.25	4.25
5	5.00	7.50	4.25
6	6.25	8.75	6.25
7	7.50	10.00	6.25
8	8.75	11.25	6.25
9	10.00	12.50	6.25
10	11.25	13.75	8.25
11	12.50	15.00	8.25
12	13.75	16.25	8.25
13	15.00	17.50	8.25
14	16.25	18.75	8.25
15	17.50	20.00	8.25
16	18.75	21.25	8.25
18	21.25	23.75	8.25
~	~	~	~
20	23.75	26.25	8.25

浙江乐马电气有限公司			设计 张书晨		
尺寸公差		角度公差		品名: GH-nY	
.X	±0.25	X.°	±3.0°	审 核	王佳
.XX	±0.15	.X°	±2.0°	图号: 12502-Y	
.XXX	±0.05	.XX°	±1.0°	批 准	陈其林
单位: mm		比例: --		页数: 1/1	
		版本: A			