
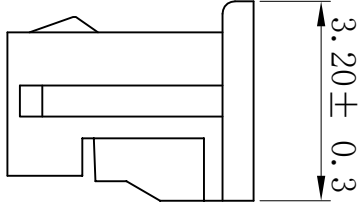
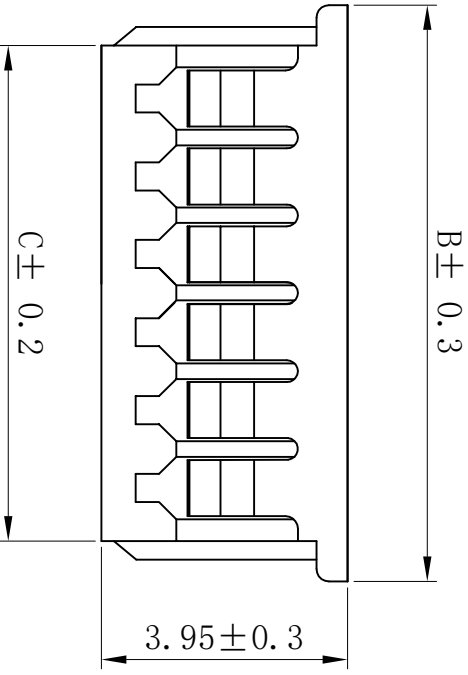


版次	日期	内容

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 125V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 500V AC/ minute
- 7、Material : Nylon UL94V-0(2)

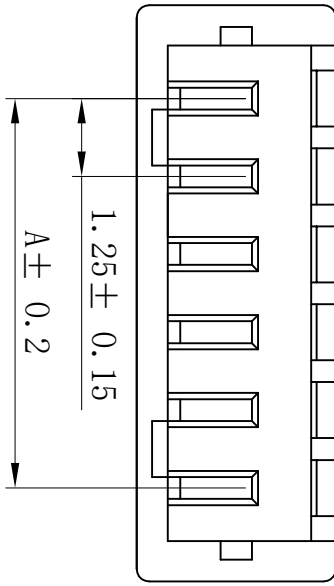

孔位 poles	A	B	C
2	1.25	4.25	2.95
3	2.50	5.50	4.20
4	3.75	6.75	5.45
5	5.00	8.00	6.70
6	6.25	9.25	7.95
7	7.50	10.50	9.20
8	8.75	11.75	10.45
9	10.00	13.00	11.70
10	11.25	14.25	12.95
11	12.50	15.50	14.20
12	13.75	16.75	15.45
13	15.00	18.00	16.70
14	16.25	19.25	17.95
15	17.50	20.50	19.20

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	MX1.25-nY	审核	王佳
.X ±0.25	X.° ±3.0°	图号:	12501-Y	批准	陈其林
.XX ±0.15	.X° ±2.0°	比例:	--	页数:	1/1
.XXX ±0.05	.XX° ±1.0°	单位:	mm	版本:	A